
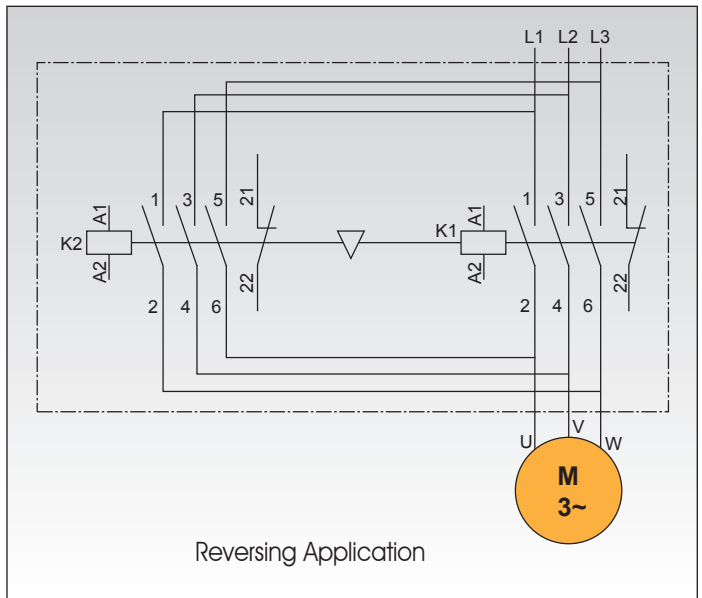


## Reversing Contactors

- A Reversing Magnetic Contactor is the product built by combining two standard magnetic contactors by use of a highly reliable mechanical interlock unit.
- It is suitable for use in direct-reverse operation, plugging and transfer between commercial and noncommercial power source for a motor.

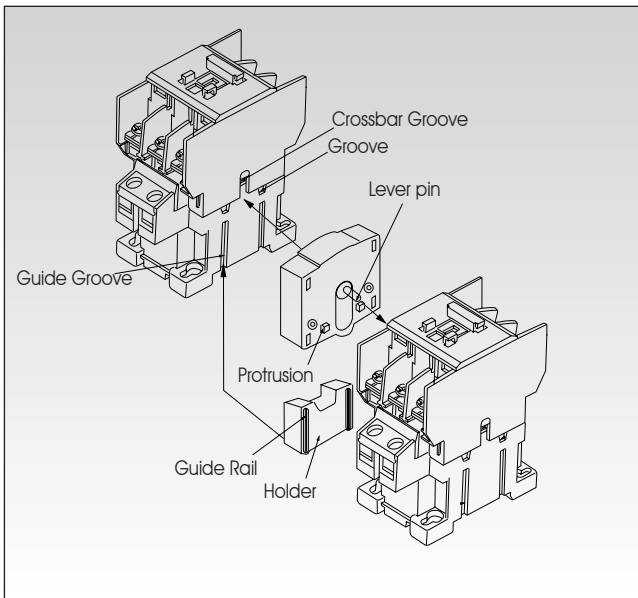

## AC-3 Utilization Categories

Type	3 Phase AC Motor Rating (AC-3)				Aux. Contact Built-in
	220 - 240V	380 - 440 V	500 - 550 V	690 B	
SCR-9	2.5 kW	4 kW	4 kW	4 kW	1NO+1NC
	11 A	9 A	7 A	5 A	
SCR-12	3.5 kW	5.5 kW	7.5 kW	7.5 kW	1NO+1NC
	13 A	12 A	12 A	9 A	
SCR-18	4.5 kW	7.5 kW	7.5 kW	7.5 kW	1NO+1NC
	18 A	18 A	13 A	9 A	
SCR-22	5.5 kW	11 kW	15 kW	15 kW	1NO+1NC
	22 A	22 A	22 A	18 A	
SCR-32	7.5 kW	15 kW	18.5 kW	18.5 kW	2NO+2NC
	32 A	32 A	28 A	20 A	
SCR-40	11 kW	18.5 kW	22 kW	22 kW	2NO+2NC
	50 A	40 A	32 A	23 A	
SCR-50	15 kW	22 kW	30 kW	30 kW	2NO+2NC
	55 A	50 A	43 A	28 A	
SCR-65	18.5 kW	30 kW	33 kW	33 kW	2NO+2NC
	65 A	65 A	60 A	35 A	
SCR-75	22 kW	37 kW	37 kW	37 kW	2NO+2NC
	75 A	75 A	64 A	42 A	
SCR-85	25 kW	45 kW	45 kW	45 kW	2NO+2NC
	85 A	85 A	75 A	45 A	